



// ONE BRAND // ONE SOURCE // ONE SYSTEM



// SERVICE // MATERIAL PROCESSING // SURFACE PROTECTION // AUTOMOTIVE

TYRE LIFT SPREADER RHS 300

The newest generation of tyre lift spreaders for preparing the inspection and repair of agricultural, truck, EM and industrial tyres for tyres with a maximum width of 1700 mm (outer diameter) or 300 kg weight.



TYRE LIFT SPREADER RHS 300

Benefits

- Table tilt range of 0 to 40 degrees allows ergonomic working when repairing shoulder area damage
- A tool tray (Ref. No. 570 1500) is optionally available to keep buffing tools plus various air buffers neatly arranged and within easy reach
- Compressed air strip on the tyre lift spreader supplies air for up to 4 pneumatic tools
- Slimline design of the machine optimises work comfort even in the smaller workshop
- Eye-level pneumatic controls
- The design of the spreader claws has been enhanced so that super single tyres can also be handled
- Mounting plate for magnetic work lights included

Technical properties

Tyre size (inch)	max. 520/60 R38
Lifting capacity at 10 bar (kg)	max. 300 kg
Lifting height (mm)	880 (upper edge of roller)
Roll-on height (mm)	280 (upper edge of roller)
Tilt range	40° (to operator's side)
Operating pressure	10 bar / 145 PSI
Weight (kg)	223 kg
Size mm	L 1380 x W 800 x H 1500 mm

Tyre lift spreader RHS 300

Ref. No. 519 9210

Optional accessories

Tool tray

Ref. No. 570 1500

With the following storage options:

- 3 x tool holder up to Ø 15 mm
- 12 x tool holder hexagonal SW 11
- 5 x tool holder up to Ø 6 mm
- 4 x holder for pneumatic wrench etc.
- 1 x aluminium rail with sliding blocks for individual accessories

Servicing unit

Ref. No. 570 1650

Up to 16 bar, consisting of compressed air regulator and oiler assembly

Multi-socket power strip

Ref. No. 570 1530

4 outlet multiple-socket for connection of electrical equipment


Slide

Ref. No. 570 1510

Provides complete protection of slide and lifting carriage from buffing dust and any kind of dirt



REMA TIP TOP AG
 Gruber Strasse 65 · 85586 Poing / Germany
 Phone: +49 8121 707-0
 Fax: +49 8121 707-10 222
 info@tiptop.de
www.rema-tiptop.com

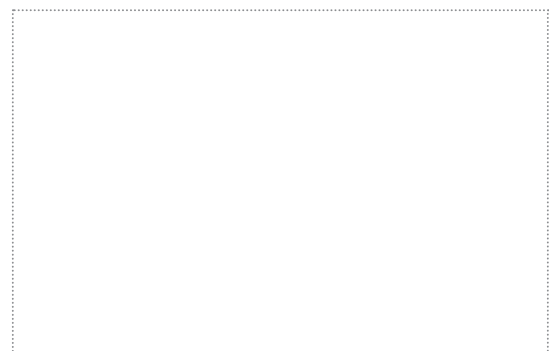

Your local contact

